



LF-168

泛用型油壓鉚釘機


- 工作台附有上下調整裝置，調整方便；適用於工件長短變化大的場合。
- 鉚合能力強，實心釘達 $\phi 12\text{mm}$ 。

Universal Hydraulic Riveting Machine

- The worktable encloses the upper and lower adjustment device, it is convenient to change: Suitable for the workpiece, either long or short.
- Strong riveting capacity up to $\phi 12\text{mm}$.

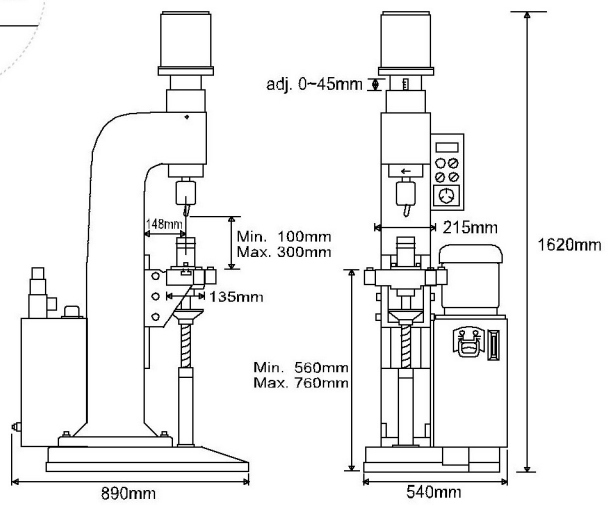

Above: actual example of processing
加工實例如上圖

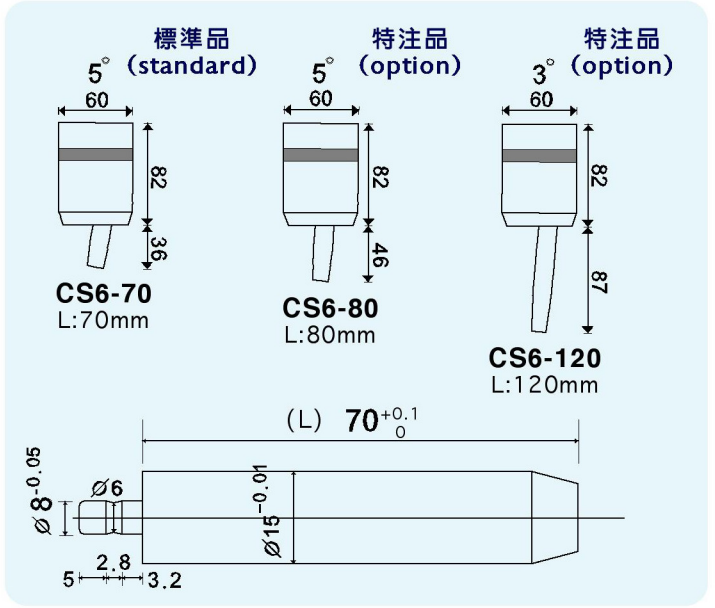

規格 SPECIFICATIONS:

夾頭行程 Stroke of spin head (mm)	鉚合能力 Riveting capacity (Mild Steel Rivet) (mm)	沖頭至台面距離 Distance between punch and table (mm)	喉 深 Depth of throat (mm)	馬 達 AC motor rating 4 poles 3 Phase	使用壓力 Gauge pressure (kgf/cm ²)	最大出力 Max. output (kgf)	時間設定 Working cycle time (second)	工作台尺寸 Working Table LxW (mm)	機 械 尺 寸 Dimension LxWxH (mm)	淨 重 N.W. (kgs)	裝 箱 尺 寸 Wooden Case LxWxH (mm)	毛 重 G.W. (kgs)
0-45	實心 (Solid) 3-12 空心 (Hollow) 3-20	100-300	148	Spindle 1 HP Pump 2 HP	10-70	1980	0.5-6	215x135	890x540x1620	365	990x640x1770	420

