



### LF-162-5A

#### 高產能油壓鉚釘機


- 鋼板機身，結構強，必要時候深可加長。
- 附有一組大型風扇冷卻系統，長時間使用，油溫不升高，壓力不衰減，可提高產量約20%，是本公司最暢銷機種。
- 最大鉚合能力，實心釘達  $\phi 12\text{mm}$ 。

#### High-Capacity Type Hydraulic Riveting Machine

- Machine body of steel plate, strong structure, if necessary, the depth of throat can be extended.
- Equipped with a set of big fan cooling system. Long-time use is possible. The oil temperature will not rise and the pressure keeps the same. The production capacity can be increased about 20%. It's the most popular model in our range.
- Max. riveting capacity up to  $\phi 12\text{mm}$  rivets.

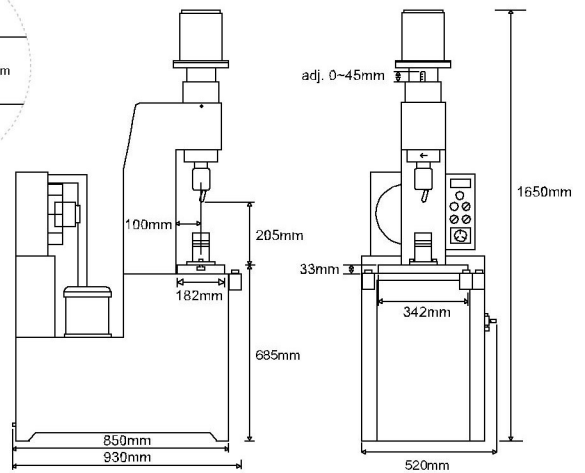

Above: actual example of processing  
加工實例如上圖

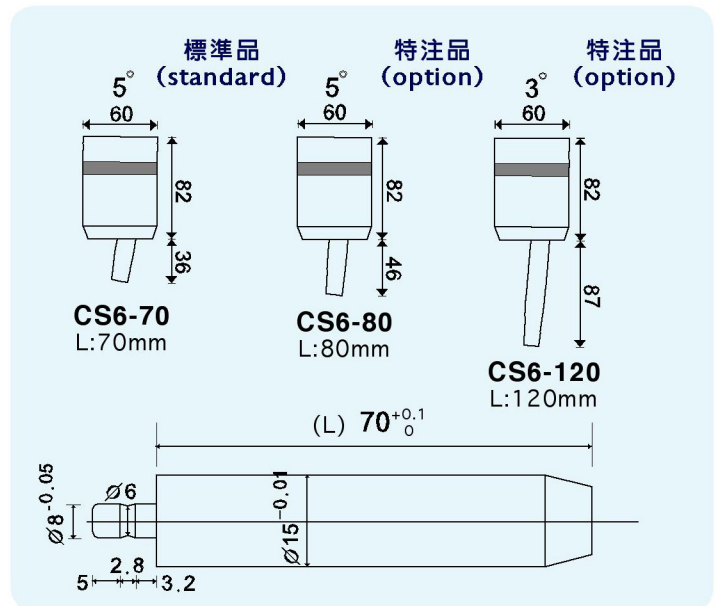

#### 規格 SPECIFICATIONS:

夾頭行程 Stroke of spin head (mm)	鉚合能力 Riveting capacity (Mild Steel Rivet) (mm)	沖頭至台面距離 Distance between punch and table (mm)	喉深 Depth of throat (mm)	馬達 AC motor rating 4 poles 3 Phase	使用壓力 Gauge pressure (kgf/cm <sup>2</sup> )	最大出力 Max. output (kgf)	時間設定 Working cycle time (second)	工作台尺寸 Working Table LxW (mm)	機械尺寸 Dimension LxWxH (mm)	淨重 N.W. (kgs)	裝箱尺寸 Wooden Case LxWxH (mm)	毛重 G.W. (kgs)
0-45	實心(Solid) 3-12 空心(Hollow) 3-20	205	100	Spindle 1 HP Pump 2 HP	10-70	1980	0.5-6	342x182	930x520x1650	400	1030x620x1820	455